

Quick Start Guide

UCH-250 Fax Server



The UCH-250 fax server is a fully managed store-and-forward system that provides the most reliable faxing over the mini-VSAT BroadbandSM service. Simply hook it up between your G3 fax machine and TracPhone[®] V7!

Connecting the UCH-250

Connect the UCH-250 to your fax machine, TracPhone V7, and vessel AC power:

- 1 Using a standard phone cable, connect your fax machine to the RJ11 port on the UCH-250.
- 2 Using a straight-through Ethernet cable, connect the UCH-250 to the router/switch (not the MTA) that is connected to the TracPhone V7.
- 3 Connect the supplied power supply to the power jack on the UCH-250 then plug it into 110V or 220V AC power.



Status LEDs

LED	Description
Mode 1, 2, 3	Not used
Network	Connected to V7 LAN
Modem	Fax machine ready
Pending	Fax in progress
Wait	Do not disconnect
Error	Incoming fax failed
Power	Input power OK



Activation (Supplement to mini-VSAT Broadband Service)

Continental U.S.: Call **+1 866 399-8509**

North/South America, Australia: Call **+1 401 847-3327**

Europe, Middle East, Asia: Call **+45 45 160 180**


Operation

From the Vessel: Fax normally to the destination fax number (include country code and area code, but **not** the international prefix like 011).

Note: The transmission report indicates the UCH-250 has received the fax; a separate On-Go report will indicate final delivery.

To the Vessel: Fax to the vessel's fax server number.

How the System Works

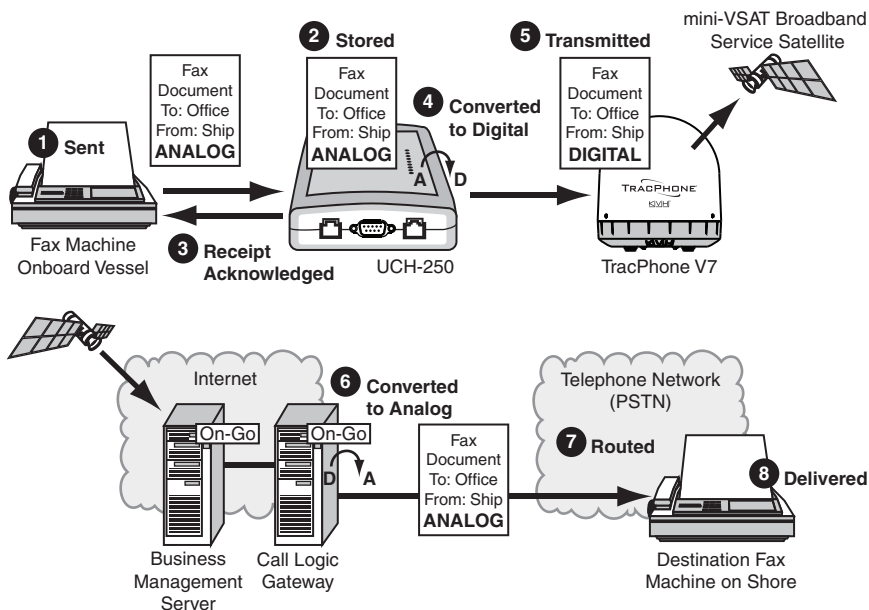

For More Information

Visit **www.on-go.com** for UCH-250 manuals and product support.